


Model 140 Installation Template

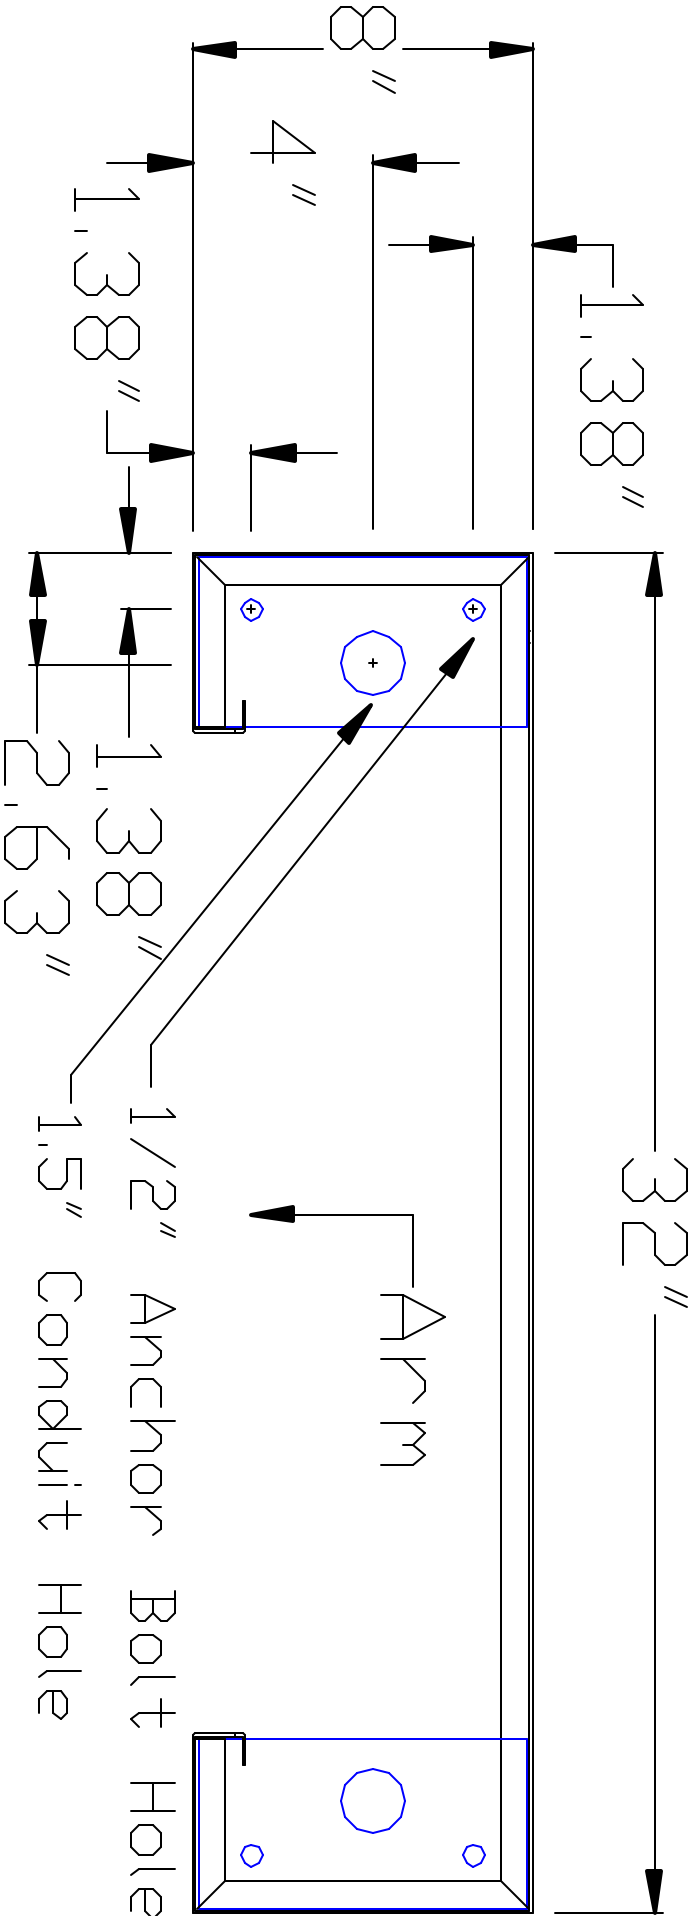

MOUNTING NOTES

- 1) MOUNTING SURFACE TO BE RIGID, LEVEL AND FLAT TO WITHIN 3/32".
- 2) USE GRADE 5 MINIMUM (1/2") FASTENERS AND CHECK PERIODICALLY (AS REQUIRED) TO INSURE TURNSTILE IS SECURELY FASTENED AND DOES NOT ROCK.
- 3) PERVEY TURNSTILES, INC., ACCEPTS NO RESPONSIBILITY WHATSOEVER FOR THE PERFORMANCE OF NON-PERVEY EQUIPMENT INSTALLED WITH THIS PRODUCT.
- 4) UNDER NO CIRCUMSTANCES INSTALL ANY ACCESSORIES THAT REQUIRE IN EXCESS OF 24 VDC. NEVER USE THE TURNSTILE AS A COMPONENT (SUCH AS A GROUND) OF AN EXTERNAL CIRCUIT. IF SUCH A NEED ARISES, ISOLATE THE TURNSTILE AND PROVIDE A SEPARATE GROUND FOR THE EXTERNAL CIRCUIT.
- 5) CHECK ALL LOCAL, STATE AND NATIONAL BUILDING CODES PRIOR TO INSTALLATION WHERE CONFLICTS ARISE. THE MOST STRINGENT REQUIREMENTS SHALL APPLY.

DO NOT SCALE DRAWING

NOTE

THIS TEMPLATE IS THE PROPERTY OF PERVEY TURNSTILES, INC. AND IS TO BE USED FOR THE INSTALLATION OF PERVEY TURNSTILES ONLY. IT IS NOT TO BE USED FOR ANY OTHER PURPOSE. PERVEY TURNSTILES, INC. IS NOT RESPONSIBLE FOR ANY DAMAGE TO THE TEMPLATE OR THE TURNSTILE CAUSED BY MISUSE.

Pervey		PART NAME	
112506		Model 140	
Base		PART NO.	
N/A		REV	
A		A	